

BIDI 25G SFP28 80KM Optical Transceiver

AE-SFP28-BX80

Product Features

- Support data rate up to 25.78125Gb/s
- Hot-Pluggable SFP Footprint and Single LC Connector
- Up to 80km reach for G.652 SMF
- EML TX and Integrated SOA & PIN TIA RX
- Temperature Range: Commercial: 0°C ~70°C; Industrial: -40°C ~85°C
- Power consumption: Commercial: 2.2W; Industrial: 2.8W
- RoHS 6 compliance
- Compliant to IEEE 802.3cc, SFF-8472 and SFF-8419
- Complies with EU Directive 2015/863/EU

Applications

- 25G Ethernet
- CPRI option 10

Description

The AE-SFP28-BX80 single mode transceiver is small form factor pluggable module for duplex optical data communications. It is designed for single mode fiber and operates at a nominal wavelength of 1295.56nm or 1309.14nm; the transmitter section uses a multiple quantum well EML, which is class 1 laser compliant according to International Safety Standard IEC-60825.

The SFP28 80km module electrical interface is compliant to SFI electrical specifications. The transmitter input and receiver output impedance is 100 Ohms differential. Data lines are internally AC coupled. The module provides differential termination and reduce differential to common mode conversion for quality signal termination and low EMI

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Storage Temperature	Tstg	-40		+85	°C	
Case Operating Temperature(Commercial)	TO	0		70	°C	
Case Operating Temperature (Industrial)	TO	-40		85	°C	
Relative Humidity - Storage	RHS	5		95	%	
Relative Humidity - Operating	RHO	5		85	%	
DC Supply Voltage	VCC	0		3.6	V	

Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Case Operating Temperature	Top	0	-	70	°C	Commercial
		-40		85		Industrial
Power Supply Voltage	VCC	3.13	3.3	3.47	V	
Transmission Distance	TD	-	-	80	km	Over SMF

Electrical Characteristics

High-Speed Signal: Compliant to CEI-25G-VSR

Low-Speed Signal: Compliant to SFF-8431

Parameter		Symbol	Min.	Typical	Max.	Unit	Notes
Supply Voltage		VCC	3.135		3.465	V	
Supply Current		ICC			660	mA	Commercial
					850		Industrial
Power Consumption		P			2.2	W	Commercial
					2.8		Industrial
Transmitter (Module Input)							
Differential Input Resistance		R_Rdin	90	100	110		
Input Differential Voltage		R_Vdiff	-	-	900	mVpp	
Tx_Disable	Normal Operation	VIL	-0.3	-	0.8	V	
	Laser Disable	VIH	2.0	-	VCC+0.3	V	
Receiver (Module Output)							
Differential Resistance		T_Rd	90	100	110	Ohm	
Output Differential Voltage		T_Vdiff	-	-	900	mVpp	
Differential Termination Resistance Mismatch		T_Rdm	-	-	10	%	
Rx los	Normal Operation	VOL	-0.3	-	0.4	V	
	Loss Signal	VOH	2		Vcchost	V	

Optical and Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Transmitter						
Average Output Power	POUT	2		7	dBm	1
Average Output Power(Laser Off)	POFF			-30	dBm	
Wavelength	λ	1294.53	1295.56	1296.59	nm	AE-SFP28-BX80-U

		1308.09	1309.14	1310.19		AE-SFP28-BX80-D
Spectrum Bandwidth @ -20dB	$\Delta\lambda$			1	nm	
Side mode suppression ratio(SMSR)	SMSR	30			dB	
Extinction ratio	ER	8			dB	
RIN20OMA	RIN			-128	dB/Hz	
Transmitter and dispersion penalty (TDP)				2.7	dB	
Receiver						
Wavelength	λ	1308.09	1309.14	1310.19	nm	AE-SFP28-BX80-U
		1294.53	1295.56	1296.59		AE-SFP28-BX80-D
Received Sensitivity	PIN			-27	dBm	1
Optical Power Overload	PIN(SAT)	-4			dBm	
Damage threshold		3			dBm	2
Rx_LOS of Signal Assert	PA	-40			dBm	
Rx_LOS of Signal De-assert	PD			-28	dBm	
Rx_LOS of Signal Hysteresis	PHY	0.5		5	dB	
Optical Return Loss Tolerance	ORLT	20			dB	

Notes:

1. Test pattern: PRBS31. BER<5x10⁻⁵;
2. The receiver shall be able to tolerate, without damage, continuous exposure to an optical input signal having this average power level. The receiver does not have to operate correctly at this input power


Digital Diagnostics

Parameter	Range	Accuracy	Unit	Calibration
Temperature	-40 to 85	±3	°C	Internal
Voltage	3.13-3.47	±3%	V	Internal
Tx Bias Current	0 to 100	±10%	mA	Internal
Tx Output Power	2 to 7	±3	dB	Internal
Rx Input Power	-28 to -4	±3	dB	Internal

Communication Interface Timing Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
TX_Disable Assert Time	t_off			100	us	
TX_Disable Negate Time	t_on			2	ms	
Time to Initialize Include Reset of TX_FAULT	t_int			300	ms	
TX_FAULT from Fault to Assertion	t_fault			100	us	
TX_Disable Time to Start Reset	t_reset	10			us	
Receiver Loss of Signal Assert Time	TA,RX_LOS			100	us	
Receiver Loss of Signal Deassert Time	Td,RX_LOS			100	us	
Rate-Select Chage Time	t_ratesel			10	us	

Pin Diagram

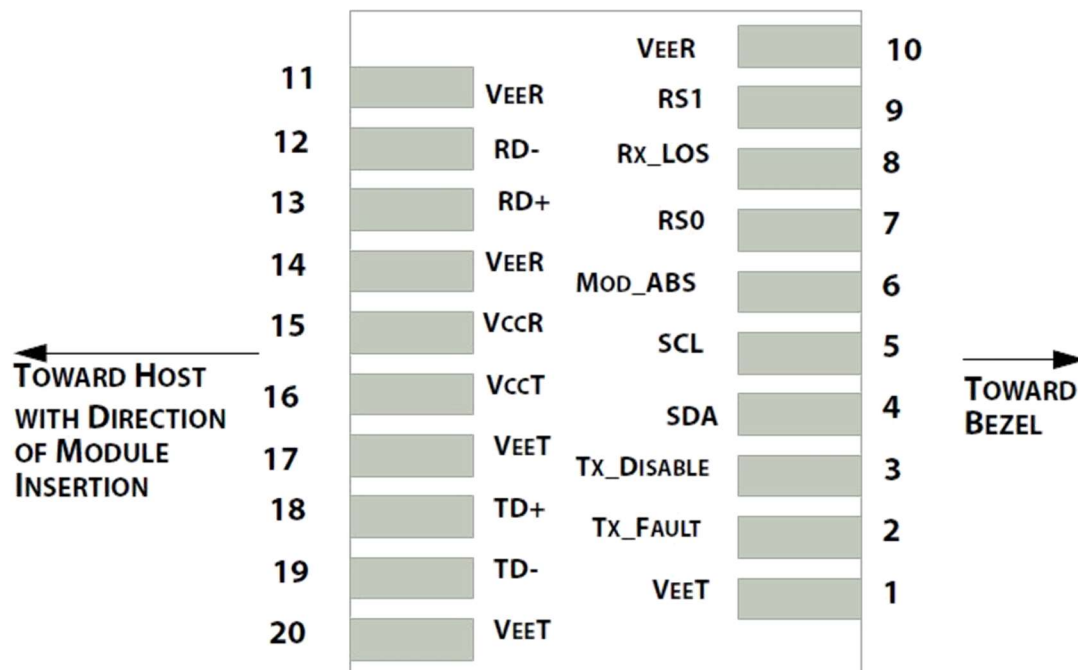

Pin Definitions


PIN #	Name	Function	Notes
1	VeeT	Module transmitter ground	1
2	Tx Fault	Module transmitter fault	2
3	Tx Disable	Transmitter Disable; Turns off transmitter laser output	3
4	SDL	2 wire serial interface data input/output (SDA)	4

5	SCL	2 wire serial interface clock input (SCL)	4
6	MOD-ABS	Module Absent, connect to VeeR or VeeT in the module	4
7	RS0	Rate select0, optionally control SFP+ receiver. When high, input data rate >4.5Gb/s; when low, input data rate <=4.5Gb/s	5
8	LOS	Receiver Loss of Signal Indication	6
9	RS1	Rate select0, optionally control SFP+ transmitter. When high, input data rate >4.5Gb/s; when low, input data rate <=4.5Gb/s	1
10	VeeR	Module receiver ground	1
11	VeeR	Module receiver ground	1
12	RD-	Receiver inverted data output	
13	RD+	Receiver non-inverted data output	
14	VeeR	Module receiver ground	1
15	VccR	Module receiver 3.3V supply	
16	VccT	Module transmitter 3.3V supply	
17	VeeT	Module transmitter ground	1
18	TD+	Transmitter inverted data output	
19	TD-	Transmitter non-inverted data output	
20	VeeT	Module transmitter ground	1


Notes:

1. Circuit ground is internally isolated from chassis ground
2. Tx FAULT is an open collector/drain output, which should be pulled up with a 4.7k – 10k Ohms resistor on the host board if intended for use. Pull up voltage should be between 2.0V to Vcc + 0.3V. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
3. Laser output disabled on Tx DIS >2.0V or open, enabled on Tx DIS <0.8V.
4. Should be pulled up with 4.7kΩ- 10kΩ host board to a voltage between 2.0V and 3.6V. MOD_ABS pulls line low to indicate module is plugged in.
5. Internally pulled down per SFF-8431 Rev 4.1.
6. LOS is open collector output. It should be pulled up with 4.7kΩ – 10kΩ on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

Recommended Interface Circuit

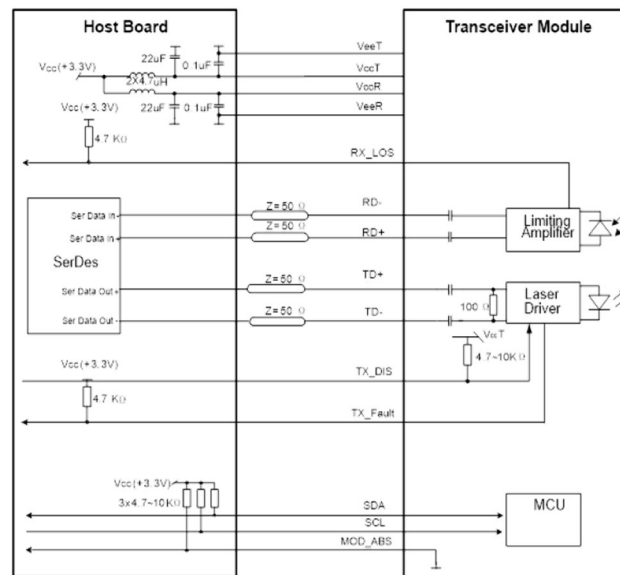

Mechanical Diagram

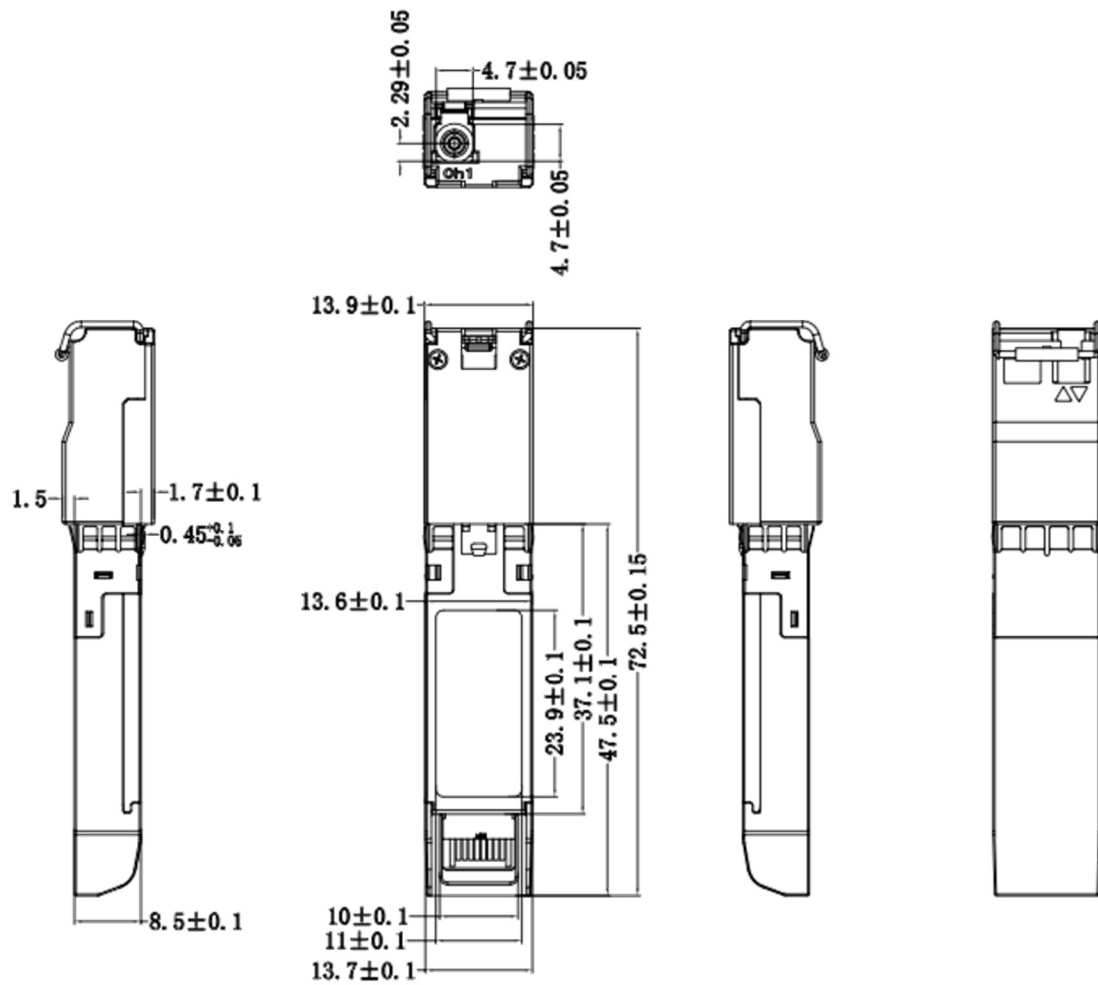

Ordering Information

Part No.	Description
AE-SFP28-BX80-U	BIDI SFP28 25G TX1295/RX1309nm 80KM
AE-SFP28-BX80-D	BIDI SFP28 25G TX1309/RX1295nm 80KM
AE-SFP28-BX80-UI	BIDI SFP28 25G TX1295/RX1309nm 80KM IND
AE-SFP28-BX80-DI	BIDI SFP28 25G TX1309/RX1295nm 80KM IND